


TYPICAL DETACHED DECK PLAN

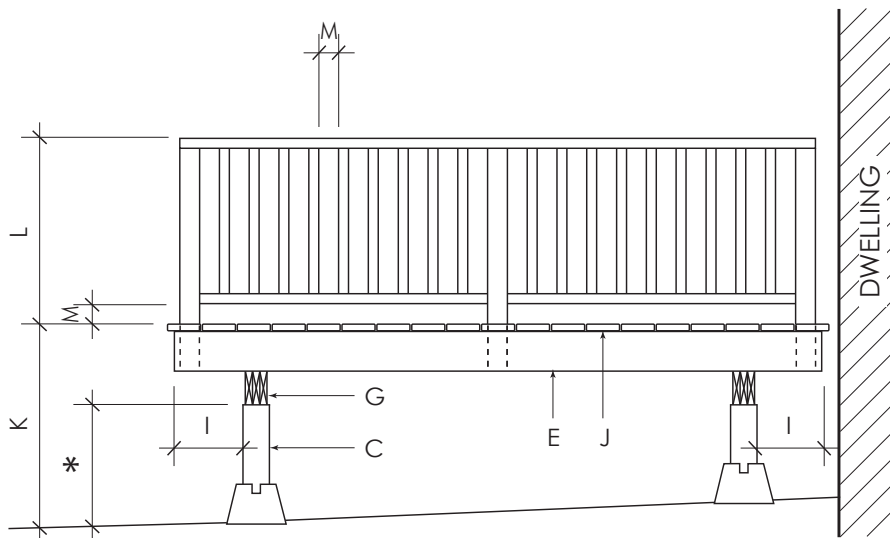

TYPICAL DETACHED DECK SECTION

DECK BLOCK LIMITATIONS:

DECK BLOCKS SHALL **NOT** BE USED TO SUPPORT;

- ROOFS
- DECKS WITH MORE THAN 1 STORY
- DECKS THAT ARE ATTACHED TO ANOTHER STRUCTURE, AND
- DECKS THAT HAVE A DIMENSION OF MORE THAN 1372MM (4'-6") FROM GRADE TO THE UNDERSIDE OF BEAMS.

STAIRS (IF APPLICABLE):

STAIR LOCATION TO BE SHOWN ON PLAN.

- STAIR STRINGERS SHALL BE PROPERLY FASTENED TO AT LEAST 38mm (1.5") OF SOLID LUMBER ON DECK.
- STAIR RISERS SHALL BE OF UNIFORM HEIGHT IN ANY ONE FLIGHT.
- STAIR RUNS SHALL BE OF UNIFORM DEPTH IN ANY ONE FLIGHT.

REQUIRED DIMENSIONS:

DECK LENGTH	A _____	JOIST CANTILEVER**	I _____
DECK WIDTH	B _____	DECKING	J _____
POST SIZE	C _____	DECK HEIGHT	K _____
POST SPACING	D _____	FOR DECKS HIGHER THAN 600mm	
JOIST SIZE	E _____	(2'-0") FROM THE GROUND -	
JOIST SPACING	F _____	GUARD HEIGHT	L _____
BEAM SIZE	G _____	STAIR GUARD HEIGHT	_____
BEAM OVERHANG*	H _____	GUARD OPENINGS	M _____

\* IF BEAM OVERHANG IS APPLICABLE THE MAXIMUM ALLOWABLE IS 300mm(12").

\*\* JOIST CANTILEVER, IF APPLICABLE:

JOIST SIZE (in/mm)	ALLOWABLE JOIST CANTILEVER "H"
2x6 / 38x140	NIL
2x8 / 38x184	16" / 400mm
2x10 / 38x235	24" / 600mm

TITLE: **DETAILS OF TYPICAL DETACHED DECK**

NOT TO SCALE

ADDRESS:

Master File Number

APPLICANT'S NAME:

